



NX 915-A

PROFESSIONAL ACTIVE SPEAKER



Description NX 915-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 15" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 131 dB SPL, distortion-free sound. Used stand-alone speaker for FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 915-A blends high-performance and reliability in a compact package. Blending RCF proprietary FiRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

- Features**
- › Up to 131 dB Sound Pressure Level
 - › 2100W Class-D Bi-Amplification
 - › 45-20000 Hz linear frequency response
 - › 1.75" Compression Driver
 - › 15" Woofer
 - › FiRPHASE zero degrees phase technology
 - › Bass Motion Control woofer excursion management


Part Number	13000674 NX 915-A	220-240 V	Black	EAN 8024530018979
	13000690 NX 915-A	115 V	Black	EAN 8024530019051



NX 915-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

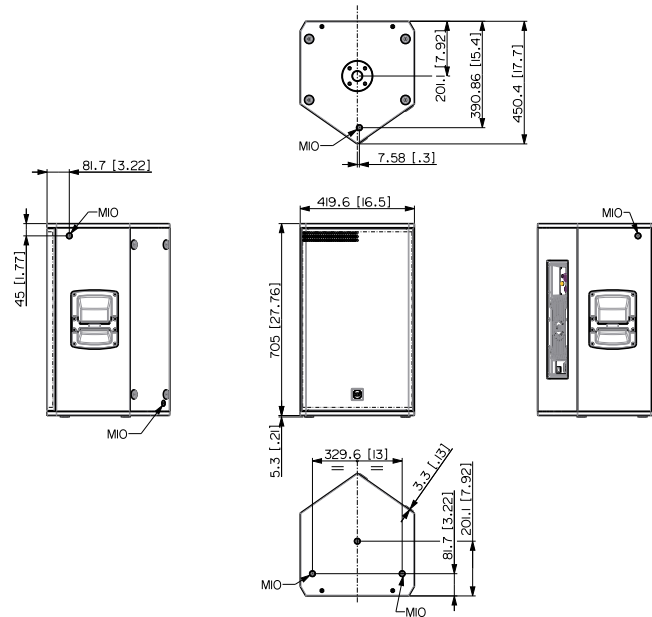

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 15", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	VDE
	Safety agency	CE compliant
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plywood
	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear
	Handles	1 x Each Side
	Pole mount/Cap	35 mm insert
	Grille	Steel
	Color	Black
	Size	Height 705 mm / 27.76 inches
		Width 420 mm / 16.54 inches
		Depth 451 mm / 17.76 inches
		Weight 24.1 kg / 53.13 lbs



NX 915-A

PROFESSIONAL ACTIVE SPEAKER

Rigging / Mounting

ACCESSORIES

FLOOR STANDS

13360109 AC PRO-FS Black EAN 8024530006471

FLYING BRACKETS

13360031 AC EB 4X EAN 8024530018870

HORIZONTAL BRACKETS

13360506 2X PLATE H-BR NX 910-912-915 Black EAN 8024530020057

13360535 H-BR 001 Black - RAL 9005 EAN 8024530020743

POLE MOUNT KITS

13360232 AC PMX EAN 8024530010058

13360110 AC PRO-PM Black EAN 8024530006488

13360067 PM-KIT M20 Black EAN 8024530014599

Protections

BAGS, COVERS

13360497 CVR NX 915 Black EAN 8024530019501

Cables

CABLES KIT

13360102 AC XLR 3M3F EAN 8024530006402