

1

NX 915-SMA PROFESSIONAL ACTIVE STAGE MONITOR




Description	NX 915-SMA speaker is a stage more combination of a 1.75" compression waveguide produces coherent 100" distortion-free sound. Used as a sta subwoofer, the NX 915-SMA blends proprietary FiRPHASE and Bass More absolute clarity and deep, powerfu carry and set up on stage or on a p	n driver, 15" woofer, two-ch ° x 70° coverage for the list age monitor, stand-alone sp s high performance and reli otion Control DSP processir I bass response. The tour-re	annel 2,100W æning area wi beaker system ability in a con ng, NX 915-SM	amplifier, and the TRW th up to 131dB SPL of a, or satellite paired with a mpact package. Combining RCF A Series speakers deliver
Features	 > Up to 131 dB Sound Pressure Leve > 2100W Class-D bi-amplification > 45-20000 Hz linear frequency re > 1.75" Compression Driver > 15" Woofer > FiRPHASE zero degrees phase te > Bass Motion Control woofer excu > 70°x100° Constant Directivity Cor > Perfectly tailored for horizontal or 	sponse chnology ırsion management verage Angle		
Part Number	13000785 NX 915-SMA 13000786 NX 915-SMA	220-240 V 100-120 V	Black Black	EAN 8024530020552 EAN 8024530020583



NX 915-SMA PROFESSIONAL ACTIVE STAGE MONITOR

Line Art 2D

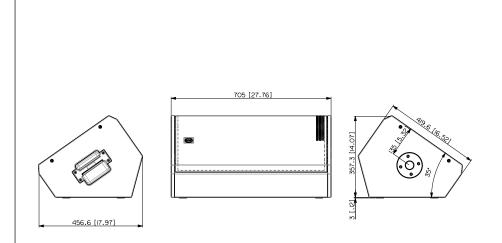

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response Max SPL @ 1m Horizontal coverage angle Vertical coverage angle	45 Hz ÷ 20000 Hz 131 dB 100° 70°
Transducers	Compression Driver Woofer	1 x 1.0", 1.75" v.c 1 x 15", 2.5" v.c
Input/Output section	Input signal Input connectors Output connectors Input sensitivity	bal/unbal Combo XLR/Jack XLR -2 dBu/+4 dBu
Processor section	Crossover Frequencies Protections Limiter	1600 Hz Thermal, RMS Soft Limiter
Power section	Total Power High frequencies Low frequencies Cooling Connections	2100 W Peak 700 W Peak 1400 W Peak Convection Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material Handles Pole mount/Cap Grille Color	Plywood 1 on side and 1 on top 35 mm insert Steel Black
Size	Height Width Depth Weight	357.3 mm / 14.07 inches 705 mm / 27.76 inches 456.6 mm / 17.98 inches 23.8 kg / 52.47 lbs



NX 915-SMA PROFESSIONAL ACTIVE STAGE MONITOR

Rigging / Mounting	ACCESSORIES FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360067 PM-KIT M20	Black	EAN 8024530014599
Protections	BAGS, COVERS, RAIN PROTECTIONS		
	13360611 CVR 010	Black	EAN 8024530020941
	RAIN PROTECTIONS		
	13360515 RP 001	Black - RAL 9005	EAN 8024530020460
Cables	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402