




Q 15-L

TWO-WAY POINT SOURCE MODULE

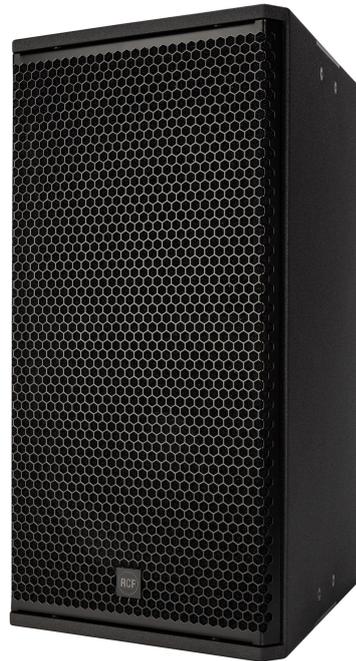

Description

Q 15-L is a two-way, bi-amp point source module for mid-distance and long-throw applications, combining a compact size with very high output and accurate speech and music reproduction. The system is equipped with the latest generation of RCF precision transducers featuring one 15" neodymium woofer and a 4" titanium-neodymium compression driver for a total of 1500 W power rating and 90° (vertical) and 22.5° (horizontal) directivity. The enclosure shape is trapezoidal and offers a 22.5° coupling angle on each side.

Q Series typical applications span from point-source configurations for mid-distance applications to clusters up to 8 modules for long-throw applications. The grille is epoxy-coated, with a woven fabric backing for dust protection. The cabinet is made of multi-ply Baltic birch plywood with a highly resistant, textured, black polyurea finishing and features two rear-panel Neutrik Speakon NL4 connections for bi-amplification (4 poles).

Features

- › 138 dB Max SPL
- › 1500 W AES power handling
- › 45 ÷ 20000 Hz
- › 90° x 22.5° constant directivity coverage
- › 1 x 15" neodymium woofer, 4.0" v.c.
- › 4" neodymium compression driver
- › Baltic birch plywood cabinet
- › Steel front grille with clothing
- › Integrated array mechanics
- › Multi-pole Speakon connectors

Part Number

13000727 Q 15-L


Black - RAL 9005 EAN 8024530018993



Q 15-L

TWO-WAY POINT SOURCE MODULE

Line Art 2D

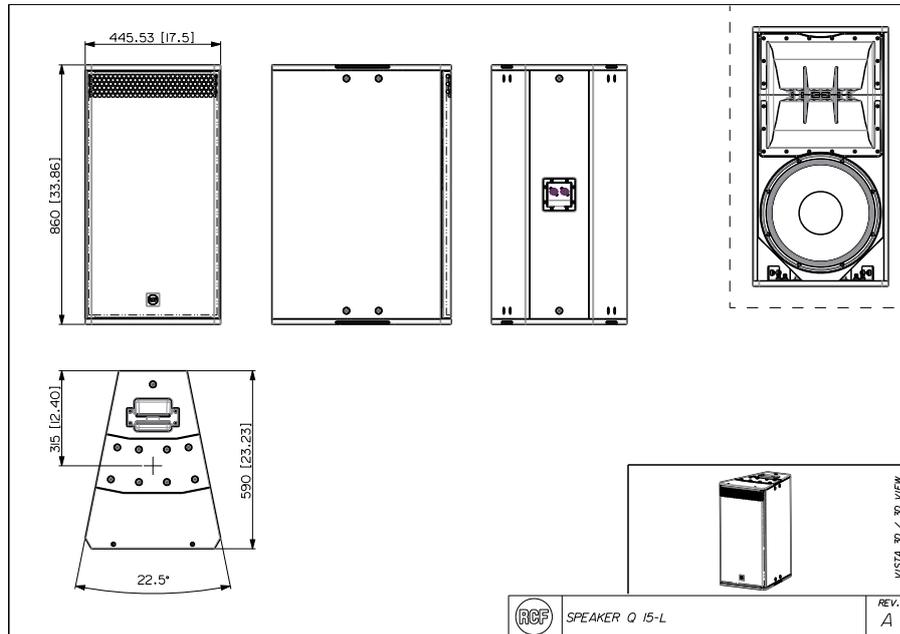

TECHNICAL SPECIFICATIONS

Acoustical specifications

Frequency Response (-10dB)	45 Hz ÷ 20000 Hz
Max SPL @ 1m	138 dB
Horizontal coverage angle	22.5°
Vertical coverage angle	90°
Directivity index Q	20

Power section

Amplification	Bi-Amp
Crossover Frequencies	600 Hz
Nominal Impedance LF	8 ohm
Power Handling LF	1350 W
Peak Power Handling LF	5400 W
Sensitivity LF	97 dB
Nominal Impedance HF	8 ohm
Power Handling HF	150 W
Peak Power Handling HF	600 W
Sensitivity HF	113 dB
Protections HF	Capacitor on Compression Driver
Recommended Amplifiers	XPS 16K, XPS 16KD, QPS 10K

Transducers

Compression Driver	1 x 1.4" neo, 4.0" v.c
Woofer	1 x 15" neo, 4.0" v.c

Input/Output section

Input connectors	Speakon® NL4
Output connectors	Speakon® NL4

Standard compliance

Safety agency	CE compliant
---------------	--------------

Physical specifications

Cabinet/Case Material	Baltic birch plywood
Hardware	Side and rear array rigging point
Handles	2
Grille	Steel
Color	Black - RAL 9005



Q 15-L

TWO-WAY POINT SOURCE MODULE

Size	Height	860 mm / 33.86 inches	
	Width	446 mm / 17.56 inches	
	Depth	590 mm / 23.23 inches	
	Weight	55 kg / 121.25 lbs	
	ACCESSORIES		
Rigging / Mounting	FLY BARS		
	13360456 FL-B H Q 15	Black - RAL 9005	EAN 8024530019099
	13360457 FL-B V Q 15	Black - RAL 9005	EAN 8024530019082
	FLYING BRACKETS		
	13360487 C-BR 10° Q 15	Black - RAL 9005	EAN 8024530019662
Upgrade Kits	CONNECTION PANELS		
	12399063 PNL IN-OUT AMPHENOL	Black	EAN 8024530020149