



S 8015 II

HIGH-EFFICIENCY SUBWOOFER



Description The S8015 II is a compact, high-output, bass reflex subwoofer. The system is equipped with an advanced, hyperventated 15" RCF precision woofer. It features massive ceramic magnet and high excursion 4" copper voice coil. The cabinet is designed to achieve tight and maximised output. The system is able to produce a Max SPL of 133 dB and handles 1000 Watts AES. The loudspeaker enclosure shape is rectangular and the cabinet is constructed of multi-ply Baltic birch plywood and finished in a very resistant, textured, polyurethane black paint. It features a M20 polemount receptacle, rubber feet, 2 x recessed handles. The front steel grille is epoxy powder coated.


- Features**
- › 15" high-efficiency RCF Precision 4" voice-coil woofer with Inside/Outside Coil Technology
 - › 133 dB maximum sound pressure level
 - › Response down to 35 Hz
 - › Rectangular box enclosure with protective metal grille
 - › 35 mm standard pole mount in top section of cabinet
 - › Baltic Birch cabinet painted with black, heavy duty, textured epoxy
 - › Integrated hand carry points

Part Number 13000398 S 8015 II Black EAN 8024530010836



S 8015 II

HIGH-EFFICIENCY SUBWOOFER

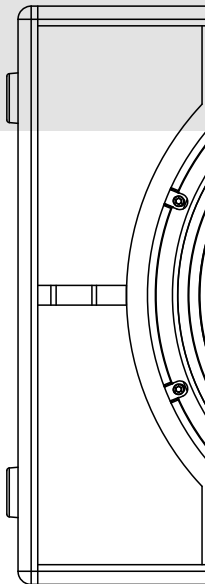

Line Art 2D

S
8
0
1
5
I
I

Acoustical specifications

TECHNICAL SPECIFICATIONS

Frequency Response (-10dB)	35 Hz ÷ 200 Hz
Max SPL @ 1m	133 dB
System Sensitivity	98 dB
Power section	
Amplification	Full Range
Nominal Impedance	8 ohm
Power Handling	1500 W
Peak Power Handling	6000 W PEAK
Transducers	
Woofer	15" neo, 4.0" v.c
Input/Output section	
Input connectors	Speakon® NL4
Output connectors	Speakon® NL4
Standard compliance	
Safety agency	CE compliant
Physical specifications	
Cabinet/Case Material	Baltic birch plywood
Handles	Integrated hand carry points
Pole mount/Cap	M20 thread
Grille	Steel
Color	Black
Size	
Height	529 mm / 20.83 inches
Width	440 mm / 17.32 inches
Depth	615 mm / 24.21 inches
Weight	34 kg / 74.96 lbs