



MK8126i

2 ウェイフルレンジスピーカー



MK シリーズは小規模な礼拝堂、小規模な講堂/劇場、A/V システム、ホテルのボールルーム、会議室などのメイン PA としての用途に最適です。また、大規模な礼拝堂、大規模な講堂/劇場、アリーナ、スタジアム、ナイトクラブ、テーマ別エンターテインメント複合施設での分散型/フィルシシステムとしての使用にも理想的です。すべての MK シリーズシステムは、クロスオーバー領域全体でパターン制御を維持する大型 HF ホーンを特徴としており、EAW のビーム幅マッチング・クロスオーバー技術により、クロスオーバー領域全体でパフォーマンスを向上させることができます。

●仕様

機器性能	
最大 SPL (12dB クレストファクター)	130 dB
最大 SPL (6dB クレストファクター)	124 dB
再生周波数帯域	65 Hz – 19 kHz
公称放射幅 (水平 × 垂直)	120° × 60°
公称フェーズ	適切なハイパスフィルターから ±15°
入力インピーダンス	LF/HF = 8 Ω
加速寿命試験	
LF/HF	49 V, 300 W
構成	
LF	1 × 8 インチコーン, 2 インチボイスコイル, バスレフ
HF	1 × 1 インチ出口径, 1.4 インチボイスコイルコンプレッションドライバー, ホーン搭載
オペレーションモード	パッシブ
物理仕様	
寸法 (H × W × D)	501.7 × 298.5 × 280.1 mm
質量	13.6 kg
梱包質量	16.3 kg
マウントアクセサリ	U ブラケット
入力端子	NL4 × 2, バリアストリップ

●入力パネル

●接続図

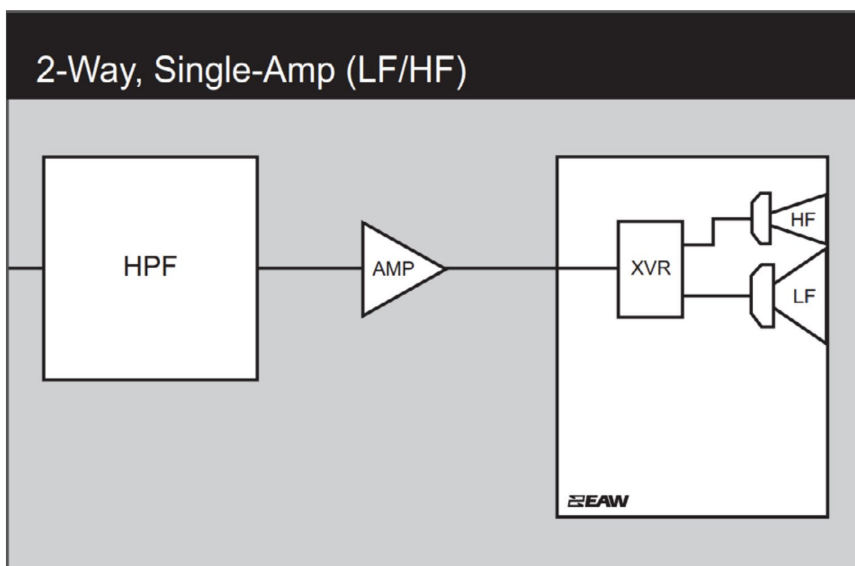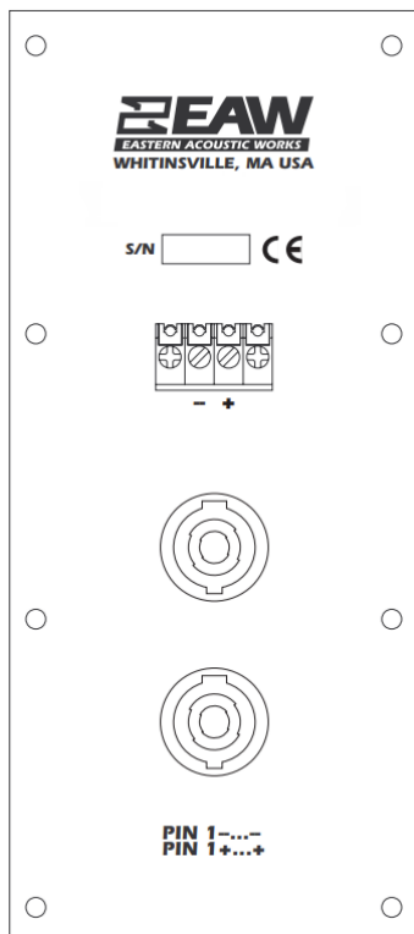

凡例

LF/MF/HF:

低域/中域/広域

AMP:


お手持ちのパワーアンプまたは NT 製品用一体化アンプ

XVR:

パッシブ LPFs, HPFs, EQ 一体化スピーカー

EAW Focusing:


EAW フォーカシング対応の DSP

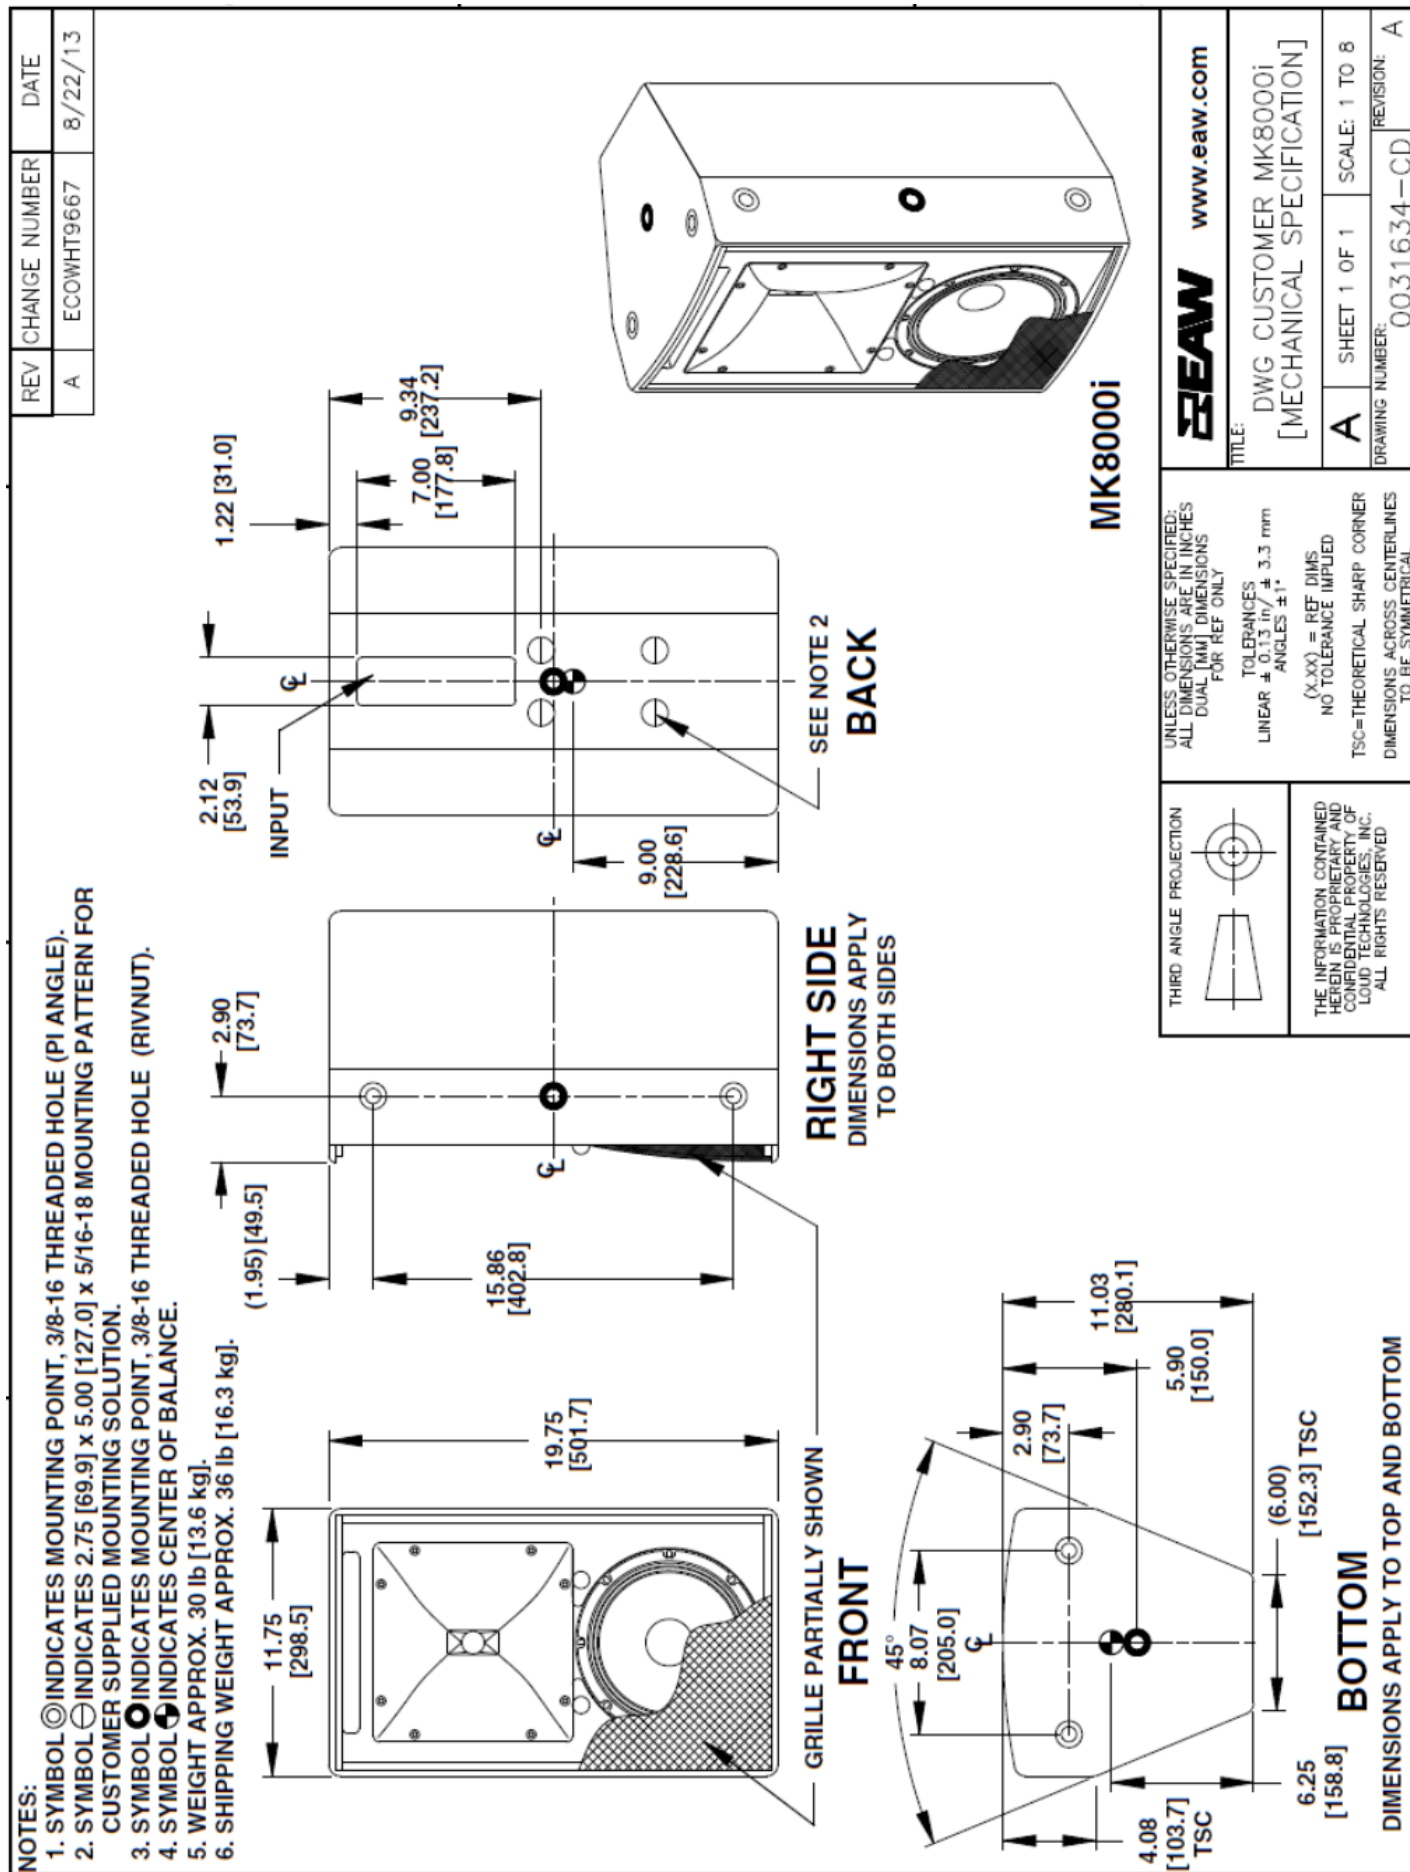


		BEAW www.eaw.com
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES DUAL [MM] DIMENSIONS FOR REF ONLY		TITLE: DWG CUSTOMER MK8000i [MECHANICAL SPECIFICATION]
TOLERANCES LINEAR ± 0.13 in / ± 3.3 mm ANGLES $\pm 1^\circ$		A SHEET 1 OF 1 SCALE: 1 TO 8
THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL PROPERTY OF LOUD TECHNOLOGIES, INC. ALL RIGHTS RESERVED		DRAWING NUMBER: 0031634-CD REVISION: A

●特性グラフ


Frequency Response(Unprocessed)

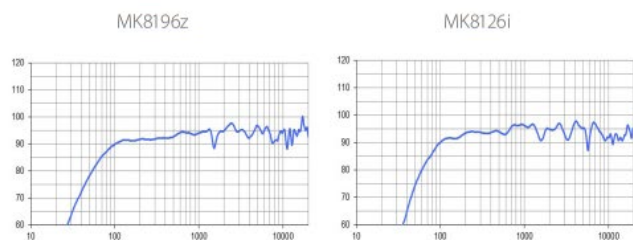


Frequency Response(Processed)

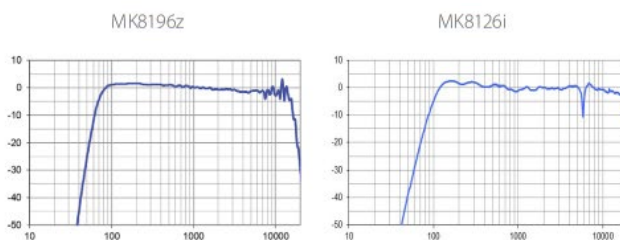

Phase Linearity

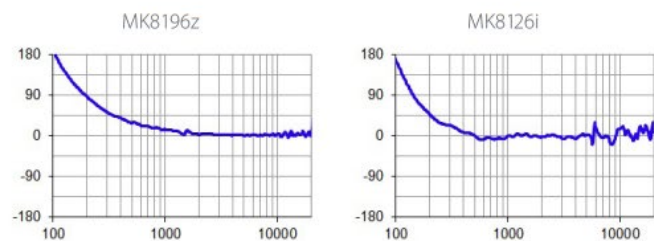

Impedance

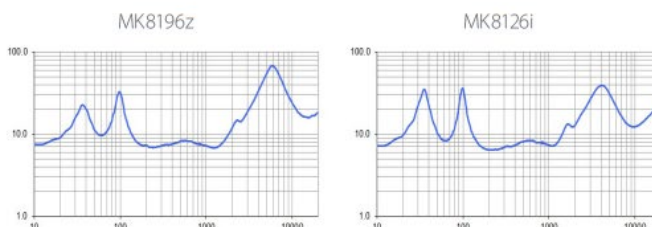

Beamwidth¹ ■=Vertical ■=Horizontal

